

Similar to EP 411628



Europäisches Patentamt  
European Patent Office  
Office européen des brevets

(11) Publication number:

**0 391 438  
A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number: 90106659.7

(51) Int. Cl. 5: C08K 5/51, C08K 5/3435,  
C08L 23/02, D01F 6/46

(22) Date of filing: 06.04.90

(30) Priority: 06.04.89 IT 2003889

(43) Date of publication of application:  
10.10.90 Bulletin 90/41

(84) Designated Contracting States:  
AT BE CH DE ES FR GB IT LI NL SE

(71) Applicant: Himont Incorporated  
2801 Centerville Road  
New Castle County Delaware(US)

(72) Inventor: Branchesi, Millo  
32 Strada S. Clemente  
I-05100 Terni(IT)  
Inventor: Clementini, Luciano  
4, via Aulo Pompeo  
I-05100 Terni(IT)  
Inventor: Spagnoli, Leonardo  
12, via del Lanificio  
I-05100 Terni(IT)

(74) Representative: Zumstein, Fritz, Dr. et al  
Dr. F. Zumstein Dipl.-Ing. F. Klingseisen  
Bräuhäusstrasse 4  
D-8000 München 2(DE)

(54) Polyolefins suitable for spinning and thermoweldable fibers obtained from them.

(57) Crystalline polymers of olefins in the form of granules or nonextruded particles having regular geometric form, containing one of more of the following stabilizers:

- a) from 0.01 to 0.5% by weight of one or more organic phosphites and/or phosphonites;
- b) from 0.005 to 0.5% by weight of one or more HALS (Hindered Amine Light Stabilizer); and optionally one or more phenolic antioxidants in concentration not higher than 0.02% by weight.

The fibers obtained from said polyolefins have high thermoweldability and good resistance to yellowing and aging.

EP 0 391 438 A2

AH

## POLYOLEFINS SUITABLE FOR SPINNING AND THERMOWELDABLE FIBERS OBTAINED FROM THEM

The present invention concerns polyolefins containing one or more organic phosphites and/or phosphonites, and/or HALS (Hindered Amine Light Stabilizer), and optionally small quantities of one or more phenolic antioxidants, and thermoweldable fibers of the above mentioned resins that can be obtained through extrusion.

5 Within the definition of fibers are included also the manufactured products similar to fibers, such as fibrils, monofilaments, and raffia.

Polyolefin fibers are used widely in manufacturing thermally welded products, in particular of nonwoven textiles, through various technologies, the most important of which, like calendering and spun bonding, require that the fibers have the capability of thermowelding at temperatures lower than the melting point of the polyolefins which constitute them.

10 Moreover said fibers and manufactured articles obtained from them must be resistant to aging, yellowing, and to the color variations induced by gas fading and oxidizing phenomena in general.

Fibers obtained from polyolefins containing the most commonly used stabilizers, such as phenolic stabilizers, have little welding capability when they are submitted to a thermomechanic treatment carried out at a temperature lower than the melting point of the polyolefins.

15 Therefore, the mechanical properties of nonwoven textiles obtained by calendering the above mentioned fibers are poor.

In order to increase substantially the strength of thermowelding among the fibers, it has been suggested that bicomponent olefin fibers, i.e., constituted by two polyolefins, such as polypropylene and polyethylene, are used, and the one with the lowest melting temperature is the one covering the surface of the fiber.

The results obtained this way are usually poor because of incompatibility phenomena between polyolefins of a different chemical nature.

Italian patent application n. 22783 A/82 shows that the thermoweldability of polyolefins fibers can be improved by adding to the polyolefins of a 3,3',4,4'-benzophenone tetracarboxylic acid di-anhydride or one of its alkyl derivative.

25 However, fibers obtained this way have a reduced resistance to yellowing and aging.

Unexpectedly, the Applicant found that polyolefin fibers with high thermoweldability, resistant to aging, yellowing, and color variations due to "gas fading" and oxidizing processes, can be obtained by starting with olefin crystalline polymers containing one or more of the following stabilizers:

30 a) from 0.01 to 0.5%, preferably from 0.05 to 0.15% by weight of one or more organic phosphites and/or phosphonites;

b) from 0.005 to 0.5%, preferably from 0.01 to 0.025% by weight of one or more HALS; and optionally one or more phenolic anti-oxidants in concentration not exceeding 0.02% by weight.

Said olefin polymers can be in granular or nonextruded particle form, having geometrically regular form, such as flakes or spheroidal particles.

35 The stabilizers are incorporated during the extrusion and granulation phase of the particles, or the nonextruded particles are coated or impregnated with the stabilizers at least on the surface, preferably after the polymerization stage.

The coating or impregnation of the nonextruded particles, particularly the spheroidal particles having diameters preferably between 0.5 and 4.5 mm, can be done in a variety of ways, such as, for example, the treatment with solution or suspension of the stabilizers and an optional subsequent evaporation of the solvent or suspension medium.


Alternately, in the processes for extrusion spinning described below, the particles of polymer mixed with the above-mentioned stabilizers can be introduced directly into the extruder.

45 In general the additivated polyolefins used to prepare the fibers according to the present invention have a melt flow index, determined according to ASTM D 1238-L regulation, between 0.5 and 100 g/10 minutes, more preferably between 1.5 and 35 g/10 minutes, obtained directly in polymerization or through controlled radical degradation.

In order to obtain the controlled radical degradation, organic peroxides are added during the granulation phase or directly in the fibers' extrusion phase.


50 The organic phosphites that can be used as additives for polyolefins according to the present invention are preferably selected among compounds with the following general formulas:

I




where  $R_1$ ,  $R_2$ ,  $R_3$ , equal or different, are alkyl, aryl, or arylalkyl radicals having 1-18 carbon atoms:

II



where  $R_1$  and  $R_2$ , equal or different, are radicals having the above-mentioned meaning;  
Q is a tetravalent alkyl radical;

III

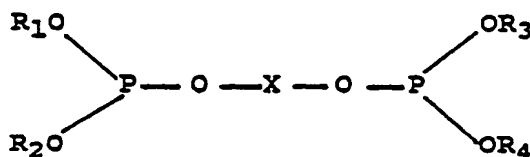

where  $R_1$ ,  $R_2$ ,  $R_3$ ,  $R_4$ , equal or different, are radicals having the significance already indicated for radicals R, X is a bivalent alkyl, aryl, or arylalkyl radical.


Examples of organic phosphites comprised in the general formula I are described in US Patents No. 4,187,212 and No. 4,290,941, which are incorporated herein for reference.

Specific examples of compounds included in general formulas I, II, III are:

tris(2,4-di-ter-butylphenyl)phosphite sold by CIBA GEIGY under the Irgafos 168 trademark; distearyl pentaerythritol diphosphite sold by BORG-WARNER CHEMICAL under the Weston 618 trademark; 4,4'-butylidenebis(3-methyl-6-ter-butylphenyl-ditridecyl)phosphite sold by ADEKA ARGUS CHEMICAL under the Mark P trademark; tris(monononyl-phenyl)phosphite; bis(2,4-di-ter-butyl)pentaerythritol diphosphite, sold by BORG-WARNER CHEMICAL under the Ultrinox 626 trademark.

The organic phosphonites that can be used as additives according to the present invention are preferably selected among the compounds of general formula:

IV




where  $R_1$ ,  $R_2$ ,  $R_3$ , equal or different, are alkyl, aryl, or arylalkyl radicals having 1-18 carbon atoms.

Alternatively, and this is preferred, the  $R_3$  radical can be substituted by a group

5

V

10



where  $R_4$  and  $R_5$ , equal or different, are radicals having the above indicated significance for the R radicals, and X is a bivalent alkyl, aryl, or arylalkyl radical.

15

Examples of organic phosphonites included in general formula IV, which can conveniently be used according to the present invention, are described in GB patent No. 1,372,528 which is incorporated herein for reference.

A preferred example of compounds comprised in general formula IV is the tetrakis(2,4-di-ter-butyl-phenyl)4,4'-diphenylenediphosphonite, sold by Sandoz under the Sandostab P-EPQ trademark.

20

The organic phosphites and phosphonites are generally used to inhibit degradation and oxidation of polyolefins in the molten state (process stabilizers), and therefore, according to known state of the art, require the addition of high quantities of phenolic stabilizers to obtain a complete stabilization.

25

The HALS, which according to the present invention are also used as polyolefins stabilizers, are amine compounds with steric hindrance of the aminic function, which are generally used as stabilizers for polyolefins in the solid state against oxidation induced by light.

In this case as well, according to known state of the art, the addition of a high quantity of phenolic stabilizers is necessary for a satisfactory stabilization of polyolefin manufactured articles.


The HALS used according to the present invention are monomeric or oligomeric compounds containing, in the molecule, one or more substituted piperidine groups having the following general formula:

30

35

VI

40




where the  $R_1$  radicals, equal or different, are  $C_1$ - $C_4$  alkyl radicals, or tetramethylpiperidine radicals, or the alkyl radicals form with the piperidine carbon atoms to which they are linked a  $C_5$ - $C_9$  cycloalkyl radical; the  $R_2$  radicals, equal or different, are hydrogen or  $C_1$ - $C_{18}$  alkyl radicals,  $C_7$ - $C_{18}$  arylalkyl radicals, or the alkyl radical form with the piperidine carbon atoms to which they are linked a  $C_5$ - $C_{10}$  cycloalkyl radical; the  $R_3$  radicals, equal or different, are hydrogen, or  $C_1$ - $C_{18}$  alkyl radicals or  $C_7$ - $C_{18}$  arylalkyl radicals; the  $R_4$  radical is hydrogen, or a  $C_1$ - $C_8$  alkyl radical, or a benzyl radical; Z is hydrogen, or a  $C_1$ - $C_{18}$  alkyl,  $C_1$ - $C_{12}$  alkylene,  $C_3$ - $C_{12}$  alkenyl,  $C_3$ - $C_5$  alkynyl,  $C_7$ - $C_{18}$  arylalkyl,  $C_2$ - $C_4$  acyl,  $C_2$ - $C_{18}$  alkanoyl,  $C_3$ - $C_{18}$  alkoxyalkyl,  $C_3$ - $C_{18}$  alkenoyl, oxylic, cyanomethyl, xylylenyl radical, or a radical having a 1 to 4 valence and containing from 1 to 4 hydroxyl groups and, optionally, ether, ester, or heterocyclic groups, being the valences of said radical linked to the nitrogen of piperidine groups, or a bivalent radical containing one or more ester or amide groups, or a


55  $\text{C}(=\text{O})-\text{N}(R_5)(R_6)$  radical where  $R_5$  and  $R_6$  are hydrocarbon radicals.

Preferably Z is a  $C_1$ - $C_{12}$  alkyl radical, or a  $C_3$ - $C_8$  alkenyl,  $C_7$ - $C_{11}$  aralkyl radical, or a bivalent radical containing one or more ester groups, being the valences of said radicals linked to the nitrogen atom of piperidine groups.


Specific examples of preferred HALS according to the present invention are compounds having the following formula:

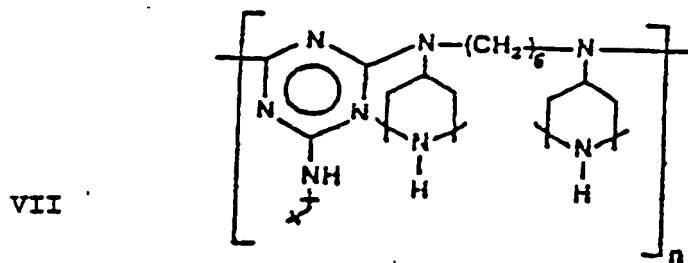


where  $n$  generally varies from 2 to 20. A compound of this type is sold by CIBA-GEIGY with the Chimassorb 944 trademark.



sold by CIBA-GEIGY under the Chimassorb 905 trademark, where R is:

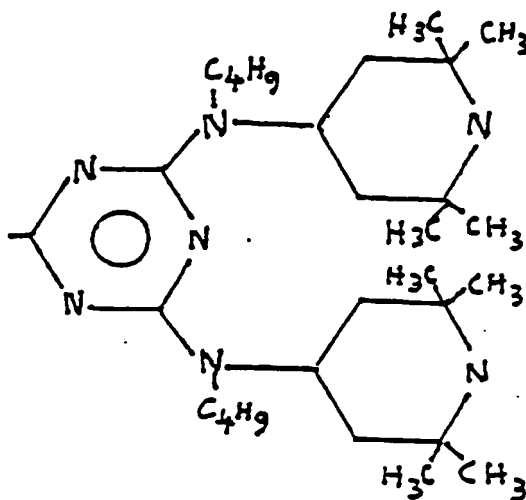


IX

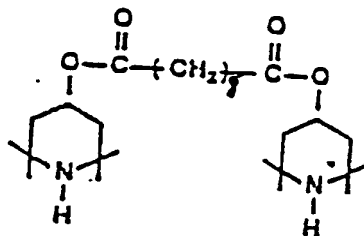


35 sold by CIBA-GEIGY under the Tinuvin 770 trademark.

X

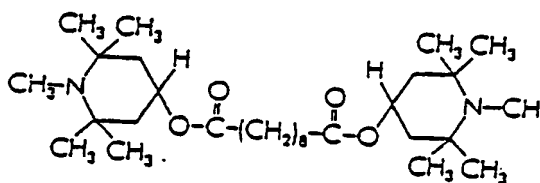

45 sold by CIBA-GEIGY under the Tinuvin 292 trademark


XI

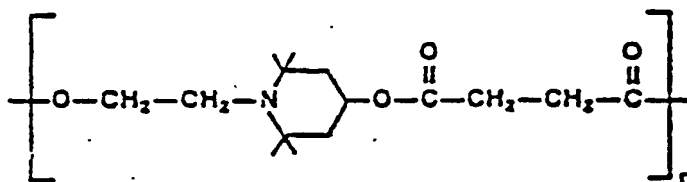

where n generally varies from 2 to 20.


A compound of this type is sold by CIBA-GEIGY under the Tinuvin 622 trademark.

XII

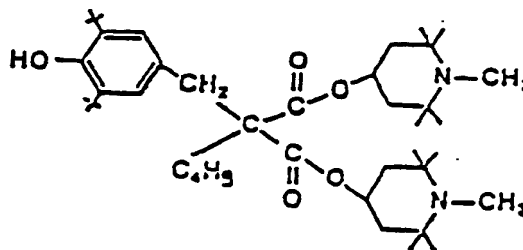

sold by CIBA-GEIGY under the Tinuvin 144 trademark.


XIII

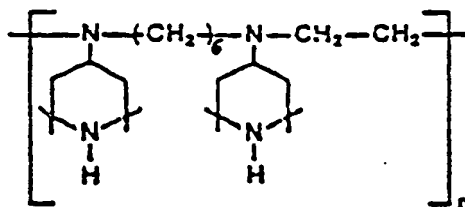

where n generally varies from 2 to 20.

A compound of this type is sold by CIBA-GEIGY under the Spinuvex A36 trademark.

XIV

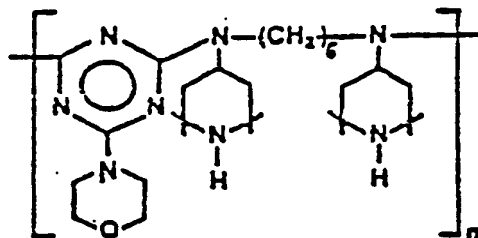

where n generally varies from 2 to 20.

A compound of this type is sold by AM.CYANAMIDE under the Cyasorb UV 3346 trademark.

As previously said, in addition to the above-mentioned additives, optionally, one or more phenolic antioxidants (sterically hindered phenols) can be used in concentration not higher than 0.02% by weight.

Examples of preferred phenolic antioxidants are: tris(4-*tert*-butyl-3-hydroxy-2,6-dimethylbenzyl)-*s*-triazine-2,4,6-(1H, 3H, 5H)trione, sold by CYANAMID under the Cyanox 1790 trademark; calcium bis[monoethyl(3,5-di-*tert*-butyl-4-hydroxybenzyl)phosphonate]; 1,3,5-tris (3,5-di-*tert*-butyl-4-hydroxybenzyl)-*s*-triazine-2,4,6-(1H,3H,5H) trione; 1,3,5-trimethyl-2,4,6-tris(3,5-di-*tert*-butyl-4-hydroxybenzyl)benzene; pentaerythritol-tetrakis-[3(3,5-di-*tert*-butyl-4-hydroxyphenyl)propionate], sold by CIBA-GEIGY under the following trademarks: Irganox 1425, Irganox 3114; Irganox 1330; Irganox 1010; 2,6-dimethyl-3-hydroxy-4-*tert*-butyl benzyl abietate.

The additives commonly used to stabilize polyolefins, particularly Ca, Mg, Zn stearates, can also be used in the preparation of the fibers according to the invention.

The polyolefins which can be used in the present invention comprise crystalline polymers or copolymers, or their mixtures, of olefins of the R-CH-CH<sub>2</sub> formula where R is a hydrogen atom or a C<sub>1</sub>-C<sub>6</sub> alkyl radical.

Particularly used are:

- 1) isotactic or prevailing isotactic polypropylene;
- 2) HDPE, LLDPE, LDPE polyethylene;
- 3) crystalline copolymers of propylene with ethylene and/or other alpha-olefins, such as for instance 1-butene, 1-hexene, 1-octene, 4-methyl-1-pentene, where the total comonomer content varies from 0.05% to 20% by weight;

4) heterophasic polymers constituted by (A) a homopolymer fraction of propylene or one of the copolymers mentioned in item (3), and a copolymer fraction (B) made up by ethylene-propylene or

ethylene-propylene-diene rubber copolymers. Said heterophasic polymers being prepared according to known methods via mixing in the melted state of the above-mentioned components, or sequential copolymerization, and containing the copolymer fraction (B) in quantities from 5% to 80% by weight, and the polypropylene fraction in quantities from 20% to 80% by weight;

5 5) syndiotactic polypropylene and its random or heterophasic copolymers as described in items (3) and (4).

Preferably used are isotactic or prevailing isotactic polypropylene, and propylene-ethylene crystalline copolymers with a prevalent propylene content.

10 In order to obtain thermoweldable polyolefin fibers according to the present invention, any spinning process and apparatus for melt extrusion known in the field may be used.

The present invention comprises, therefore, also the thermoweldable polyolefin fibers containing the stabilizers in the above-mentioned quantities.

For the preparation of the fibers it's preferable to use extruders with spinners' holes having a length/diameter ratio greater than 2.

15 The operation can occur at a spinner's temperature between 260°C and 300°C, and at a spinning velocity between 0.1 and 0.8 g/min hole.

During the spinning it's possible to introduce in the fibers other additives such as pigments, opacizers, fillers, etc.

20 The fibers obtained by extrusion are eventually submitted to stretching with stretching ratios generally between 1:1.1 and 1:8 and at temperatures between 80°C and 150°C, preferably between 100°C and 130°C, using stretching apparatus heated, i.e., with hot air, vapor, or heating plates.

The melt flow index of the fibers obtained in this manner is usually higher with respect to the values of the original polyolefins because of the spinning treatment.

Indicatively, one can obtain melt flow index values for the fibers between 4 and 150 g/10 minutes.

25 The fibers obtained with the above-mentioned methods can be mono- or multifilament, and may be used for the preparation of staples or thermally cohered products, especially of nonwoven textiles.

Optionally, before the transformation to finished manufactured articles, the fibers can be submitted to refinishing treatments such as crimp, thermofixing etc.

30 As previously stated, the nonwoven textiles may be prepared with a variety of known technologies, such as the calendering of staple fibers and the spun bonding, operating preferably at a temperature of 10-20°C lower than the melt temperature of the polyolefins constituting the fibers.

Said products have high mechanical properties, thanks to the mechanical resistance of the thermowelding that can be obtained with the fibers of the present invention.

35 The above-mentioned fibers, in fact, are characterized by a high thermowelding strength, determined according to the method described in the examples. Preferably this parameter varies from 2 to 5 N.

Moreover, the manufactured articles derived from the fibers of the present invention show satisfactory resistance to aging and color changes.

Following are some examples which are given to illustrate but not to limit the invention.

## 40 EXAMPLES

### 45 EVALUATION OF THE PROPERTIES OF THE FIBERS PREPARED IN THE EXAMPLES

#### THERMOWELDING STRENGTH

50 Usually, in order to evaluate the thermowelding ability of the fibers it is customary to produce a nonwoven via calendering under special conditions, and measure the stress necessary to tear said nonwoven in a direction transversal to the calendering one, operating according to ASTM 1682 regulation.

The stress value determined in this manner is considered a measure of the ability of the fiber to thermoweld.

55 The result obtained, however, is influenced substantially by the finishing characteristics of the fibers (crim, finish, thermofixing, etc.) and the condition of preparation of the card veil fed to the calender.

In order to prevent these inconveniences and obtain a more direct evaluation of the thermowelding characteristics of the fibers, a method has been devised which will be schematically described below.

Some samples are prepared starting with a rove of 400 tex (ASTM D 1577-7 regulation) and 0.4 m long,



made up of continuous fibers.

After having twisted said rove eighty times, the two extremities are joined, obtaining a manufactured article where the two halves of the rove are twisted around each other as in a rope.

The two twisted roves are thermowelded at a temperature of about 15 °C lower than the melting point of the polyolefin which makes up the fibers, operating for a predetermined period of time with a thermowelder of the type commonly used in laboratories for the study of thermoplastic films.

The average force required to detach the two roves of each sample at the thermowelded point is measured with a dynamometer.

The result, expressed in N, is obtained by averaging out at least 8 measurements, and it expresses the thermowelding strength among fibers.

In the following examples a Sentinel model 12-12 AS thermowelder was used, operating with thermowelding periods of 1 second and a thermowelding pressure of about 2.85 Kg/cm<sup>2</sup>.

## 15 COLOR CHANGES

The IXSO/TC38/SC1 norm was used at 60 °C and at 130 °C to measure the resistance of fibers to colorations induced by gas fading, while the resistance to colorations induced by oxidation phenomena was measured by keeping the fibers in an oven at 90 °C for 2 days, and the coloration was evaluated based on the gray scale, as described in the above-mentioned norm.

## RESISTANCE TO ARTIFICIAL AGING

The above-mentioned property was evaluated by submitting the fibers to accelerated aging in a ventilated oven at 110 °C, according to ASTM D 3045-74 regulation.

The time (in days) necessary to reach total decay of the mechanical properties (embrittlement) was determined.

## 30 EXAMPLES 1-14 AND COMPARATIVE EXAMPLES 1-8

We prepared 5 Kg. samples made up of polypropylene in flake form at controlled granulometry (average diameter of particles 450 m) with the following characteristics:

- residue insoluble in boiling heptane	96%
- number average molecular weight	65,700
- weight average molecular weight	320,000
- melt flow index	12.2 g/10 min
- ashes at 800 °C	160 ppm

and additivated with calcium stearate at a concentration of 0.05% by weight.

To each sample were added the stabilizers listed in Table 1, through a Henschell type speed mixer for powders.

The mixture 1 thus obtained have been granulated by extrusion at 220 °C, and the granules have been spun in a system with the following main characteristics:

- extruder with 25 mm diameter screw and length/diameter ratio = 25, and a capacity from 1.0 to 6.0 Kg/h;
- spinner with 19 holes with a diameter of 0.4 mm and length/diameter ratio = 5;
- metering pump;
- quenching system with air at a temperature of 18-20 °C;
- gathering device with a speed of 500 to 2000 m/min.;
- fiber stretching device with hot roller at speed varying from 30 to 300 m/min, and steam stretch oven.

The conditions used for spinning and stretching were:

- a) temperature of spinner = 290 °C;
- b) hole capacity 0.45 g/min.;
- c) gathering speed 1500 m/min;

d) stretch ratio 1:1.5.

The main mechanical characteristics of the fibers thus obtained are included in the following ranges:

- titre (ASTM D 1577-79 regulation) 1.9 - 2.2 dtex
- strenght (ASTM D 2101-82 regulation) 15-20 cN/tex
- 5 - elongation to break (ASTM D 2101-82 regulation) 300- 400%.

In table 1 are shown for all the examples the thermowelding strength (thermowelding temperature = 150 °C), the accelerated aging resistance values (in days), and the color changes compared to the gray scale.

- 10 In particular, for the color changes, the first result reported in Table 1 is relative to the change induced by gas fading at 60 °C after 4 cycles, the second result is relative to the change induced by gas fading at 130 °C after 15 minutes, the third to the coloration induced by oxidizing phenomena, determined as described above.

#### 15 EXAMPLES 15-17 and COMPARATIVE EXAMPLE 9

5 Kg. samples have been prepared, made up of polypropylene in the form of spheroidal particles with diameter between 2 and 3 mm and having the following characteristics:

20

- insoluble in xylene at 25 °C	96.5%
- number average molecular weight	64,000
- weight average molecular weight	325,000
- melt flow index	11.8 g/10 min.
25 - ashes at 800 °C	150 ppm

25

The above-mentioned samples have been surface additivated with the stabilizers shown in Table 2.

- 30 The additivation was done by treatment with aqueous suspensions and subsequent drying. The polymer particles have then been further additivated with calcium stearate in weight concentration of 0.05%.

The polymer thus obtained was spun according to methods described in preceding examples.

The mechanical properties of the fibers were within the ranges described in the preceding examples.

- 35 In Table 2 are shown, for all examples, the thermowelding strength (thermowelding temperature = 150 °C), the accelerated aging resistance values in days, and color changes, determined as per the preceding examples.

#### EXAMPLE 18

- 40 5 Kg of random crystalline propylene/ethylene copolymer containing 2.3% by weight of ethylene, are additivated with:

- 0.05% by weight calcium stearate;
- 0.05% by weight of Sandostab P-EPQ;
- 0.01% by weight of Chimassorb 944;

- 45 and then they are granulated by extrusion.

The methods employed are the same as described in exmples 1-14.

The granules are then spun with the same technologies described in example 1-14.

The mechanical properties of the fibers thus obtained were within the ranges described in examples above-mentioned.

- 50 The thermowelding strength (thermowelding temperature = 140 °C) was 3.8 N.

The time of resistance to accelerated aging and the color changes, measured as described above, were respectively 6 and 5 days; 5; 5.

#### 55 EXAMPLES 19-23

Operating in the same conditions and same propylene homopolymer of examples 1-14, we prepared samples in the form of extruded granules containing the following additives (percentage by weight):

- 0.05% calcium stearate
- 0.015% Chimassorb 944
- 0.04% Irgafos 168
- 0.01% Irganox 1076.

5     The granules were spun with the same methods of examples 1-14 using the gathering speed and the stretching ratios indicated in Table 3 for each example.

     In the same table are also shown the title, strength, and elongation at break values of the fibers obtained, as well as the thermowelding strength (thermowelding temperature = 150 °C), resistance to aging and color change values, determined as per the preceding examples.

10

15

20

25

30

35

40

45

50

55

Table 1

Example No.	Additives	% by weight	Thermowelding strength N	Accelerated aging days	Colour change
1	Weston 610	0.05%	2.5	2.0	5; 5; 5
2	Sandostab P-EPQ	0.05%	2.8	2.0	5; 5; 5
3	Irgafos 168	0.05%	3.0	2.0	5; 5; 5
4	Chimassorb 944	0.02%	3.0	4.0	5; 5; 5
5	Chimassorb 944	0.05%	3.0	6.0	5; 5; 5
6	Tinuvin 622	0.02%	3.0	4.0	5; 5; 5
7	Tinuvin 770	0.02%	3.0	4.0	5; 5; 5
8	Tinuvin 144	0.02%	3.0	4.0	5; 5; 5
9	Tinuvin 144 Chimassorb 905	0.05% 0.02%	3.0	5.0	5; 5; 5
10	Sandostab P-EPQ Chimassorb 944	0.05% 0.02%	3.5	6.0	5; 5; 5
11	Irgafos 168 Chimassorb 944	0.05% 0.02%	4.0	6.0	5; 5; 5
12	Irgafos 168 Chimassorb 944	0.05% 0.05%	4.2	10	5; 5; 5
13	Tinuvin 622 Irgafos 168	0.02% 0.05%	4.0	6.0	5; 5; 5

continued: Table 1

Example No.	Additives	% by weight	Thermowelding strength N	Accelerated aging days	Colour change
14	Sandostab PEPQ (Tinuvin 144)	0,05% 0,02%	3,5	6,0	5; 5; 5
Comparative Example No.					
1	Irganox 1010	0,05%	1,2	2,0	2; 2; 2
2	Irganox 1425	0,05%	1,4	4,0	3; 3; 3
3	Irganox 3114	0,05%	1,5	2,0	4; 3; 3
4	Cyanox 1780	0,05%	1,5	3,0	4; 3; 2
5	Irganox 1010 (Irgafos 168)	0,05% 0,05%	1,0	2,0	2; 2; 2
6	Irganox 1010 (Chimassorb 944)	0,05% 0,05%	1,0	10	2; 2; 2
7	Tinuvin 622	0,8%	1,8	15	4; 4; 4
8	Tinuvin 622 (Sandostab P-EPQ)	0,8% 0,7%	2,5	20	4; 4; 5

Table 2

Example No.	Additives	% by weight	Thermowelding strength	Accelerated aging days	Colour change
15	(Chimassorb 944 Irgafos 168	0,02% 0,05%	4,0	6	5; 5; 5
16	Sandostab P-EPQ	0,05%	3,0	2	5; 5; 5
17	(Tinuvin 144 Irgafos 168	0,02% 0,05%	3,8	6	5; 5; 5
Comparative Example No.					
9	Irganox 1010	0,05%	1,2	2	2; 2; 2

Table 3

Example No.	Gathering speed m/min.	Stretching ratio	Title dtex	Strength	Elongation at break %	Thermowelding strength N	Accelerated aging days	Color change
19	2000	1 : 1,25	1,9	15	400	3,2	5	5; 5; 5
20	1500	1 : 1,7	2,1	18	350	3,1	5	5; 5; 5
21	1000	1 : 2,5	2,0	24	280	3,3	6	5; 5; 5
22	800	1 : 3,1	1,95	27	200	3,1	6	5; 5; 5
23	600	1 : 4,1	2,2	32	100	3,0	5	5; 5; 5

### Claims

1. Crystalline polymers of olefins in the form of granules or nonextruded particles having a regular geometric form, containing one or more of the following stabilizers:

a) from 0.01 to 0.5% by weight of one or more organic phosphites and/or phosphonites;

b) from 0.005 to 0.5% by weight of one or more HALS; and optionally one or more phenolic antioxidants in concentration not greater than 0.02% by weight.

2. Polymers of olefins as per claim 1, in the form of spheroidal particles having a diameter from 0.5 to 4.5 mm.

3. Polymers of olefins as per claim 1, constituted of homopolymers or copolymers, or their mixtures, of olefins of the formula  $R-CH=CH_2$  where R is a hydrogen atom or a  $C_1-C_6$  alkyl radical.


4. Polymers of olefins as per claim 3, selected among with isotactic, or prevalingly isotactic polypropylene, and propylene-ethylene crystalline copolymers containing prevalently propylene.

5. Polymers of olefins as per claim 1, where the stabilizers (a) content varies from 0.05 to 0.15% by weight, and the stabilizers (b) content varies from 0.01 to 0.025% by weight.


6. Polymers of olefins as per claim 1, where the organic phosphite or phosphites are selected among compounds having the general formulas:



where  $R_1$ ,  $R_2$ ,  $R_3$ , equal or different, are alkyl, aryl, or arylalkyl radicals with 1 to 18 carbon atoms:




where  $R_1$  and  $R_2$ , equal or different, are radicals having the above-mentioned meaning; Q is a tetravalent alkyl radical;

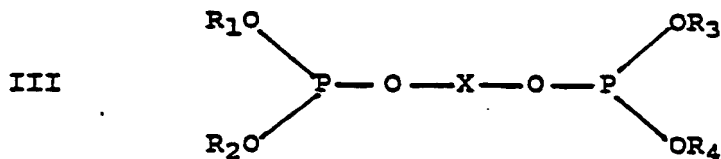


where  $\text{R}_1$ ,  $\text{R}_2$ ,  $\text{R}_3$ ,  $\text{R}_4$ , equal or different, are radicals with the meaning indicated for the R radicals, X is an alkyl, aryl, or arylalkyl bivalent radical.

7. Polymers of olefins as per claims 6, where the organic phosphite or phosphites are selected among tris(2,4 di-ter-butylphenyl)phosphite; distearyl pentaerythritol diphosphite; 4,4'-butylidene-bis(3-methyl-6-ter-butylphenyl-di-tridecyl)phosphite; tris(mononylphenyl)phosphite; bis(2,4-di-ter-butyl)pentaerythritol diphosphite.

8. Polymers of olefins as per claim 1, where the organic phosphonite or phosphonites are selected among compounds of the general formula:

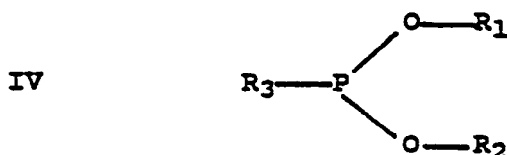

where  $\text{R}_1$ ,  $\text{R}_2$ ,  $\text{R}_3$ , equal or different, are alkyl, aryl, or arylalkyl radicals with 1 to 18 carbon atoms, or the  $\text{R}_2$  radical is substituted by a group

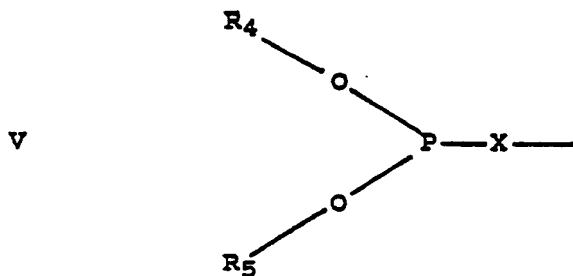


where  $\text{R}_4$  and  $\text{R}_5$ , equal or different, are radicals with the meaning above indicated for the R radicals, and X is an alkyl, aryl, or arylalkyl bivalent radical.

9. Polymers of olefins as per claim 8, where tetrakis[2,4-di-ter-butylphenyl]4,4'-diphenyl phosphonite is used as the organic phosphonite.

10. Polymers of olefins as per claim 1 where the HALS are selected among monomer or oligomer compounds which containing in the molecule one or more substituted piperidine groups having the following general formula:



VI




where the  $R_1$  radicals, equal or different, are  $C_1$ - $C_4$  alkyl radicals, or tetramethylpiperidine radicals, or the alkyl radicals form with the piperidine carbon atoms to which they are linked a  $C_5$ - $C_9$  cycloalkyl radical; the  $R_2$  radicals, equal or different, are hydrogen or  $C_1$ - $C_{18}$  alkyl radicals,  $C_7$ - $C_{18}$  arylalkyl radicals, or the alkyl radical form with the piperidine carbon atoms to which they are linked a  $C_5$ - $C_{10}$  cycloalkyl radical; the  $R_3$  radicals, equal or different, are hydrogen, or  $C_1$ - $C_{18}$  alkyl radicals or  $C_7$ - $C_{18}$  arylalkyl radicals; the  $R_4$  radical is hydrogen, or a  $C_1$ - $C_8$  alkyl radical, or a benzyl radical; Z is hydrogen, or a  $C_1$ - $C_{18}$  alkyl,  $C_1$ - $C_{12}$  alkylene,  $C_3$ - $C_{12}$  alkenyl,  $C_3$ - $C_5$  alkynyl,  $C_7$ - $C_{18}$  arylalkyl,  $C_2$ - $C_4$  acyl,  $C_2$ - $C_{18}$  alkanoyl,  $C_3$ - $C_{18}$  alkoxyalkyl,  $C_3$ - $C_{18}$  alkenoyl, oxylic, cyanomethyl, xylylenyl radical, or a radical having a 1 to 4 valence and containing from 1 to 4 hydroxyl groups and, optionally, ether, ester, or heterocyclic groups, being the valences of said radical linked to the nitrogen of piperidine groups, or a bivalent radical containing one or more ester or amide groups, or a

25  $\text{-C(=O)-N(R}_5\text{)(R}_6\text{)}$  radical where  $R_5$  and  $R_6$  are hydrocarbon radicals.


11. Polymers of olefins as per claim 10 where the HALS is or are selected among the compounds with the formulas:

VII

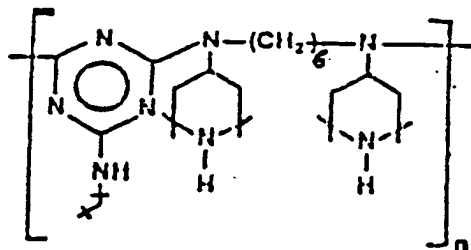


40 where n varies from 2 to 20.


VIII




where R is:

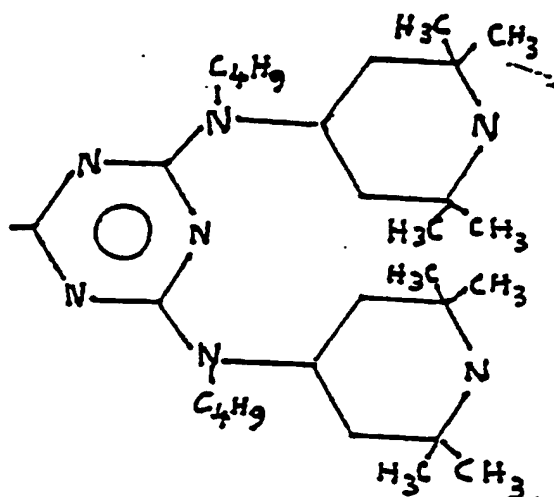


IX

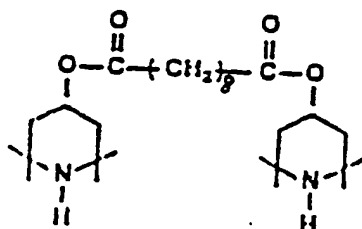

X

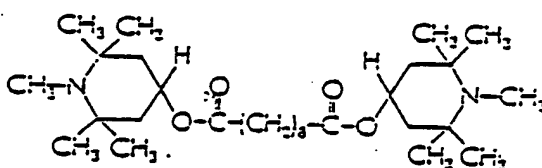


XI

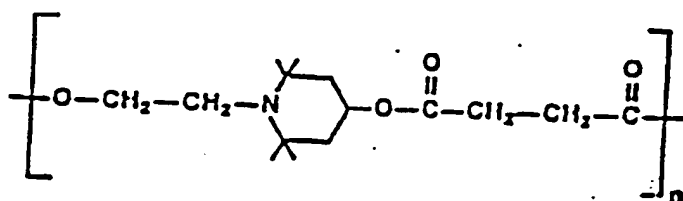


where n varies from 2 to 20.

XII

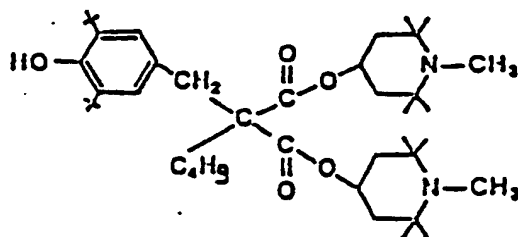


XIII

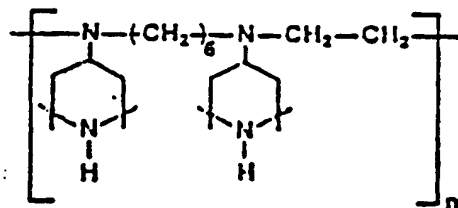

where n varies from 2 to 20.

XIV

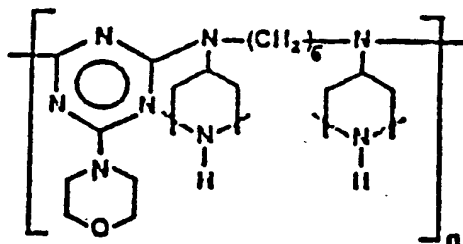

where n varies from 2 to 20.

12. Polymers of olefins as per claim 1 where the phenolic antioxidant or antioxidants are selected among tris(4-*t*-butyl-3-hydroxy-2,6-dimethylbenzyl)-*s*-triazine-2,4,6-(1*H*,3*H*,5*H*)trione; calcium bi[monoethyl-(3,5-di-*ter*-butyl-4-hydroxybenzyl)phosphonate]; 1,3,5-tris (3,5-di-*ter*-butyl-4-hydroxybenzyl)-*s*-triazine-2,4,6-(1*H*,3*H*,5*H*)trione; 1,3,5-trimethyl-2,4,6-tris(3,5-di-*ter*-butyl-4-hydroxybenzyl)benzene; pentaerythritol-tetrakis-[3-(3,5-di-*ter*-butyl-4-hydroxyphenyl)propionate]; 2,6-dimethyl-3-hydroxy-4-*ter*-butyl benzyl abietate.

13. Thermoweldable polyolefin fibers comprising the polymers of olefins as per claims 1 to 12.

14. Thermoweldable polyolefin fibers as per claim 13 having a thermoweldable strength from 2 to 4.5 N.

15. Thermally welded manufactured articles obtained from thermoweldable polyolefin fibers as per claims 13 and 14.

16. Nonwoven textiles obtained by calendering or spun bonding the fibers mentioned in claims 13 and 14.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:

**0 391 438 A3**

(12)

**EUROPEAN PATENT APPLICATION**(21) Application number: **90106659.7**(51) Int. Cl.5: **C08K 5/3435, C08K 5/51,  
D01F 6/46, C08L 23/02**(22) Date of filing: **06.04.90**(30) Priority: **06.04.89 IT 2003889**(43) Date of publication of application:  
**10.10.90 Bulletin 90/41**(64) Designated Contracting States:  
**AT BE CH DE ES FR GB IT LI NL SE**(66) Date of deferred publication of the search report:  
**18.03.92 Bulletin 92/12**(71) Applicant: **Himont Incorporated  
2801 Centerville Road  
New Castle County Delaware(US)**(72) Inventor: **Branchesi, Millo  
32 Strada S. Clemente  
I-05100 Terni(IT)  
Inventor: Clementini, Luciano  
4, via Aulo Pompeo  
I-05100 Terni(IT)  
Inventor: Spagnoli, Leonardo  
12, via del Lanificio  
I-05100 Terni(IT)**(74) Representative: **Zumstein, Fritz, Dr. et al  
Dr. F. Zumstein Dipl.-Ing. F. Klingseisen  
Bräuhausstrasse 4  
W-8000 München 2(DE)**(54) **Polyolefins suitable for spinning and thermoweldable fibers obtained from them.**

(57) Crystalline polymers of olefins in the form of granules or nonextruded particles having regular geometric form, containing one of more of the following stabilizers:

- a) from 0.01 to 0.5% by weight of one or more organic phosphites and/or phosphonites;
  - b) from 0.005 to 0.5% by weight of one or more HALS (Hindered Amine Light Stabilizer);
- and optionally one or more phenolic antioxidants in concentration not higher than 0.02% by weight.

The fibers obtained from said polyolefins have high thermoweldability and good resistance to yellowing and aging.

**EP 0 391 438 A3**



European  
Patent Office

# EUROPEAN SEARCH REPORT

Application Number

EP 90 10 6659

## DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
X	EP-A-0 276 923 (TONEN SEKIY. KK) * page 2, line 28 - line 32 *** examples COMP.4; table 1 *** claim 10 ** - - -	1-6,13,16	C 08 K 5/3435 C 08 K 5/51 D 01 F 6/46 C 08 L 23/02
X	PATENT ABSTRACTS OF JAPAN vol. 7, no. 281 (C-200)(1426) 15 December 1983 & JP-58 160 333 ( TOA NENRYO KK ) 22 September 1983 * abstract ** - - -	1-7,10, 11,13,16	
A	EP-A-0 228 837 (EP PASO PRODUCTS COMP) * claims 1-5; table 1 ** - - -	1-12	
X	US-A-4 222 931 (MINAGAWA ET AL) * column 30; examples 3-4,6,10 *** column 32, line 5 - line 14 ** - - - - -	1,3-5	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			C 08 K D 01 F C 08 L
Place of search		Date of completion of search	Examiner
The Hague		10 January 92	SCHUELER D.H.H.
CATEGORY OF CITED DOCUMENTS			
X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention		E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons - - - - - &: member of the same patent family, corresponding document	